

THE CHARLOTTETOWN GUARDIAN

Mr. Charles Dalton, President. J. R. Burnett, Editor and Publisher. D. K. Currie, Associate Editor.

MONDAY, MAY 29, 1922

ADVERTISING P. E. ISLAND

The Rotary Club, the Charlottetown Board of Trade and the Retail Merchants' Association, jointly, have issued a neat and attractive folder descriptive of Prince Edward Island and its attractions for tourists.

It is hoped that next year, or rather during next winter and early spring, the worthy efforts of these organizations will be supplemented by a generous grant from the local government and that a much more pretentious publicity campaign will be conducted.

The little folder here mentioned is a good beginning but only a beginning. We trust that the necessary steps will be taken in time to put on a really effective publicity campaign for next summer.

fertility of the soil is maintained and the finished products sold are not a drain upon it. When we sell the raw product we are selling the soil's fertility.

NOTHING LEFT

There is not enough of either the Liberal or the Progressive platform left to make even a souvenir of the last election. Only the broken promises remain.

No one but the gullible expected that the preposterous pre-election promises of the Liberal federal candidates would be kept and this is the pity of it.

THE JACK DEMPSEYS

Most of our readers know something about Jack Dempsey, some of them more than we do. Many of them have seen his photograph for Jack is a man of world wide fame and his photograph has adorned the pages of newspapers the world over.

Jack is world famed, as we have said, because he can hit harder and faster than any other man who has tried conclusions with him and can stand harder punches than any other man who has exchanged punches with him.

The ideal stock food is the food grown on the farm and fed where it is grown. It is sometimes difficult, if not impossible, to raise sufficient concentrates on the farm for the stock kept, but the more of such raised and fed on the farm the better.

Notes By The Way

(From the Examiner)

"That the best interests of Canada demand that substantial reductions of the burdens of customs taxation be made with a view to the accomplishing of two purposes of the highest importance.

"First—Diminishing the very high cost of living which presses so severely on the masses of the people.

"Second—Reducing the costs of the implements of production in the industries based on the natural resources of the Dominion.

"That to these ends, wheat, wheat flour, and all products of wheat; the principal articles of food; farm tractors; mining, flour and saw mill machinery, and repair parts thereof; rough and dressed lumber; gasoline, illuminating, lubricating and fuel oils; nets, net-urnes and fishermen's equipments, cements, and fertilizers, should be free from customs duties, as well as the raw material entering the same.

"That revision downwards of the tariff should be made whereby substantial reductions should be effected in the cost of wearing apparel, footwear and other articles of general consumption, other than luxuries, as well as on raw materials, entering into the manufacture of the same.

"That the British preference be increased to 50 per cent. of the general tariff.

"And the Liberal party pledges

Daily Selections for Guardian Reader

From the W. A. Louson collection

WAITING

The following poem is from the pen of John Burroughs, the Naturalist, who died suddenly while on his way to California.

Sorene I fold my hands and wait, Nor care for wind, nor tide, nor sea; I have no more 'gainst time or fate, For lo! my own shall come to me.

I stay my haste, I make delays; For what avails this eager pace? I stand amid the eternal ways, And what is mine shall know my face.

Asleep, awake, by night or day, The friends I seek are seeking me; No wind can drive my bark astray, Nor change the tide of destiny.

What matter if I stand alone? I wait with joy the coming years; My heart shall reap where 't has sown, And garner up its fruit of tears.

The waters know their own, and draw The brook that springs in yonder heights; So flows the good with equal law Unto the soul of pure delight.

Yon flower nodding in the wind, Is ready plighted to the bee; And, maiden, why that look unkind? For lo! thy lover seeketh thee.

The stars come nightly to the sky The tidal wave unto the sea; Nor time, nor space, nor deed, nor high, Can keep my own away from me.

John Burroughs

cept the amount for much less. The curious thing is that the \$500,000 is at any time available for such a performance in a world that is actually starving for the things which the \$500,000 dollars would provide.

The universities are starving for means to develop the purposes for which they were established; our hospitals and our orphanages and our juvenile reform schools are starving for funds to keep them afloat, to save human life and relieve human suffering, to care for children, to save boys from criminality.

Jack Dempsey is a type. He is one of a species which is as numerous today as it was two thousand years ago when "butchered to make a Roman holiday" expressed the Christian opinion of the amusements of the age.

Are the Jack Dempseys of the prize ring, of the movies, of the general entertainment world of today placed by the public in the category to which they belong? Are we aiding in the development of a cleaner civilization when we hand out princely remuneration to the Jack Dempseys of the athletic and sporting world while the things that matter in the higher sense are begrudged even a living wage?

to implement by legislation the provisions of this resolution when returned to power." —Liberal Platform of 1919.

Such was the platform adopted at the great Liberal Convention three years ago. The convention was large and enthusiastic. Messrs. Mackenzie King and W. S. Fielding were both present. Both of them were candidates for the leadership of the party, made vacant by the death of Sir Wilfrid Laurier. The platform was unanimously adopted.

Let the reader take note of the last paragraph cited above — the party pledge to implement by legislation the provisions of that platform! Why was that added to all the rest? Obviously because of what had occurred before. When the Liberal party came into power under Sir Wilfrid Laurier in 1896 they had a platform which pledged them to "root out the last vestige of protection."

There had been a great betrayal. The party had proved false to its platform, false to all its professions and promises. Who would trust them now unless they gave some special assurance? Wherefore the platform of 1919 must be not only signed but sealed, like a bond—signed, sealed and attested by every sanction that could bind men to keep their promises.

They have returned to power; they have the same Finance Minister that they had from 1896 to 1911. Leader King and Finance Minister Fielding are bound by all that can bind men of honor to keep the pledge that they made less than three years ago. How they have kept it is told in Mr. Fielding's budget speech. If the first Fielding tariff in 1897 was as little like the party platform as chalk is like cheese, his present tariff compares with his platform as a serpent to a fish.

Look at it! Where are the substantial reductions of the burdens of taxation? Where are free wheat and wheat flour, the free principal articles of food? Where are the free farm implements and machinery? Where are the free gasoline, illuminating and fuel oils? Where are the free cements and fertilizers? Where is the 50 per cent. British preference? All of these were promised in the platform but none of them are found in the tariff.

But there is something else, something different found there, something that stings the taxpayer—50 per cent. added to the sales tax. That was not promised, but we got it all the same. It was not asked for, but Mr. Fielding gave it to the dear people as a sort of surprise. It is estimated, we are told that this will cost the people forty millions of dollars a year and the reductions in duties will lighten their burdens by about one million.

The sales tax touches every man, woman and child in the Dominion. It differs from all other taxes in that particular. It is the most sweeping of all the taxes we pay a tax on every sale from a penny bun to a motor car, and so on up to the costliest thing that may be bought or sold. And this tax Mr. Fielding has increased by 50 per cent. This one little item among the increases of taxation will average twenty-five dollars per family throughout Canada yearly.

With one hand Mr. Fielding has reduced taxation slightly, to a total of about one million dollars while with the other hand he has laid on new or additional taxes of forty to fifty millions. This is what comes of the promised "revision of the tariff downwards," "the substantial reductions of customs taxation," to "diminish the very high cost of living," and so on! We need not say more. Let the reader peruse the Liberal platform and the Fielding tariff and see for himself how that once great party keeps faith with the people!

MAY BREAK DEADLOCK.

ST. JOHN, Nfld., May 24. Robert Morgan of Winnipeg, formerly employed by the Newfoundland land government as expert adviser on railway matters, will return to the colony in a few days to assist in breaking the present transportation deadlock. Premier Squire announced today. Morgan is superintendent of terminals for the Canadian Pacific Railway. The Premier said that negotiations were proceeding with the Reid Company and that he hoped to be in a position to announce some arrangement at the end of the week.

MAID CLAIMS HER PEARL

ATLANTIC CITY, N. J., May 26.—When a maid nearly strangled on a pearl contained in a clam she sampled while preparing her employer's dinner, is the gem her property.

This novel question is in controversy between Mrs. O. J. Hammell, of Ventnor, president of the League of Women Voters and Lotie Gray, one of her servants.

The girl ate one of the clams she was opening on Monday night and nearly choked on what she believed was a marble. Mrs. Hammell was attracted to the kitchen by the confusion. She hit the maid several sharp raps on the back and the obstruction was dislodged. It proved to be a giant pearl, reflecting all the colors of the rainbow.

Lotie refused to surrender the gem. When Mrs. Hammell became insistent she also lost her maid. Lotie consulted counsel, who advised that her title was clear.

U. S. Postal Service To Be Weeded Out

NEW YORK, May 26.—Finger prints will be taken of every one of the thousands of postal employees in New York City, according to an order issued today. This is in line with the plan announced earlier in the day to make the department "100 per cent bandit proof" by weeding out the undesirable personnel, remodeling buildings, using marines, permanently for guarding valuable mails and other methods.

As soon as the decision was made, the actual work started among the 15,000 men in the Manhattan and Bronx branches of the department. Postmaster Edward M. Morgan submitting to the process first of all and being followed by the others.

Editor Indicts Pretty Stenog.


LONDON, May 26.—Business and beauty will not run in harness. At least this is what Sydney A. Moseley, managing editor of the New Southend Times says. He has put a ban on pretty typists. Mr. Moseley has advertised for a private secretary who must be an expert shorthand typist. Looking grimly at the foot of the advertisement is the steered harden announcement.

"Good looks not a qualification". Mr. Moseley takes the stand that he will not allow the modern siren to wreck his office. To this end he has framed an indictment against the pretty stenographer which hangs in a conspicuous place in his office. It reads as follows:

"She is self conscious and vain. "She fiddles about with her fin or nails or her hair. "She writes love letters on the office typewriter, in office time, and to the exclusion of office letters. "She ogles most of the callers. "She presents a superior air to her lower order of things in the office. "She causes the junior clerks to die". "Give me the plain girl without any airs or graces," Mr. Moseley concludes "She always settles down to steady work."

REPORT OF DRIVE DENIED.

ROMA, May 27.—The Stefani Agency quotes an Italian official statement denying reports of a "great offensive" by the Italians against the Arabs at Tripolitania. It is declared that there has been no offensive action and that the Italian soldiers were sent to Tripolitania merely for police duty.

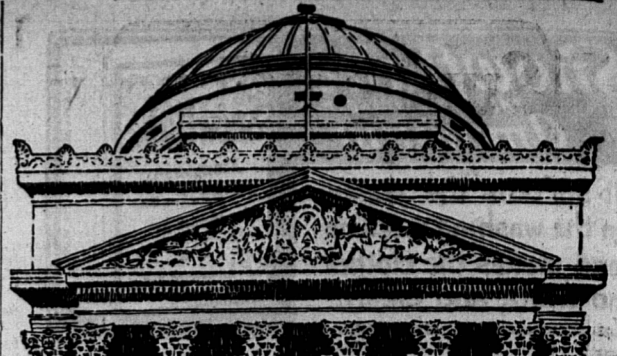

A Complete Banking Service Small traders and great industrial corporations—workmen with modest savings accounts and farmers with their banking business—find in the Bank of Montreal the banking service they require extended to them with courteous attention. The facilities of this Bank are equally at the service of every class in the community.

BANK OF MONTREAL ESTABLISHED MORE THAN 100 YEARS CHARLOTTETOWN BRANCH. E. G. COOMBS - Manager.

THE KINEMATOGRAPH IN ENGINE DESIGN.—A new type of petrol engine recently produced in Great Britain possesses many interesting features. It is designed to retain the essential advantages of the two-stroke engine while avoiding certain disadvantages and difficulties usually met with in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test this engine developed 10 horse power at 3,800 revolutions per minute, and when fitted to a motor cycle frame gave an average petrol consumption of over 60 miles per gallon. The use of castings requiring special care in that type. In order to perfect the design the inventor carried out a series of experiments with the aid of a kinematograph apparatus for the movement and velocity of gas. When under test